

Experimental Investigation of Boiling Heat Transfer Coefficient of MC22 on Horizontal Copper Rod

by Firman Firman

Submission date: 14-Feb-2022 07:26AM (UTC+0000)

Submission ID: 1761986804

File name: g_Heat_Transfer_Coefficient_of_MC22_on_Horizontal_Copper_Rod.pdf (565.22K)

Word count: 1843

Character count: 9614

ISSN 1742-6596

Journal of Physics

Conference Series

The 11th Biennial Conference on
Classical and Quantum Relativistic
Dynamics of Particles and Fields

1239

VOLUME 1239 – 2010

4–7 June 2009
Mérida, Yucatán, Mexico

EDITOR
María Land

The open access journal for conference proceedings
iopscience.org/jpc

IOP Publishing

PAPER • OPEN ACCESS

9
Experimental Investigation of Boiling Heat Transfer Coefficient of MC22
on Horizontal Copper Rod

To cite this article: Firman and Muhammad Anshar 2019 *J. Phys.: Conf. Ser.* **1364** 012061

5
View the [article online](#) for updates and enhancements.



IOP ebooks™

Bringing together innovative digital publishing with leading authors from the global scientific community.

Start exploring the collection—download the first chapter of every title for free.

Experimental Investigation of Boiling Heat Transfer Coefficient of MC22 on Horizontal Copper Rod

Firman^{1*}, Muhammad Anshar¹

¹The Department of Mechanical Engineering, Politeknik Negeri Ujung Pandang, Makassar, Indonesia 90245

*email: firman@poliupg.ac.id

Abstract. In recent years, refrigerant MC 22 as a kind of natural refrigerant which is environmentally- friendly has been considered to used in refrigeration and air conditioning applied. The research aim to ascertain boiling heat transfer coefficient of refrigerant MC22 on horizontal copper rod. This work has been done experimentally by especially designed for this investigation. A copper rod with 12 mm diameters and 70 cm long was used as a testing object in boiling heat transfer test apparatus. Method was used by heating the copper rod at from 2 to 10 watts with 2 watts increases; each increases was made after a 2 minutes time interval. It was concluded that the enhanced of heat flux caused the increasing of boiling heat transfer coefficient of refrigerant MC 22.

1. Introduction

The use of environmentally friendly alternative refrigerants such as hydrocarbon refrigerants is growing and become more widely used. This is understandable because hydrocarbon refrigerants do not contain chlor elements, so they do not damage the ozone layer and do not cause global warming either. The damage to the ozone layer decreases due to the use of HC refrigerants (hydrocarbons) compared to refrigerants using CFCs (chlorofluorocarbons) and HCFCs (hydrochlorofluorocarbons) [1]. This shows that the use of HC refrigerant is much better compared to CFC and HCFC refrigerants.

In anticipation to the transition of refrigerants use from CFC or HCFC to HC, there are now many types and brands of HC refrigerants produced in industrialized countries. Indonesia has produced HC refrigerants with the Musicool brand including MC 22 and MC134. However, Musicool refrigerants that have been widely used are MC 22 refrigerants, especially air conditioner (AC) use.

2. Literature review

The performance of a refrigeration engine is affected by the boiling heat transfer of refrigerants. On the other hand, boiling heat transfer is strongly influenced by thermodynamic properties and refrigerant transport. In addition, a homogeneous single system heat transfer of



convection is very important to consider in thermal design. But also equally important is that which relates to fluid phase changes. Two very important examples are the phenomenon of condensation and the boiling phenomenon. In the boiling process there is usually a high heat transfer and affects the heat transfer coefficient. In addition, the quality of steam also affects the heat transfer coefficient [2, 3]. This is used as a basis for consideration in the design of heating devices or heat exchangers. In addition to thermodynamic properties, the heat transfer coefficient is also influenced by the surface roughness of the pipe [4]. The same opinion that micro fin on the pipe surface will result in a very significant increase in heat transfer [5]. In terms of operating conditions, increasing the nucleic boiling pressure affects the increase in heat transfer coefficient [6]. If the presence of fin on the pipe surface affects heat transfer, it can be assumed that the flow type also affects heat transfer. This can be modified because the shape of the fin can change the direction of fluid flow. In line with this opinion, that is the flow of refrigerant in the form of swirling in the pipe affects the heat transfer coefficient [7].

3. Methods

The test tool scheme of heat transfer of MC 22 refrigerant boilers is shown at Figure 1 as follows:

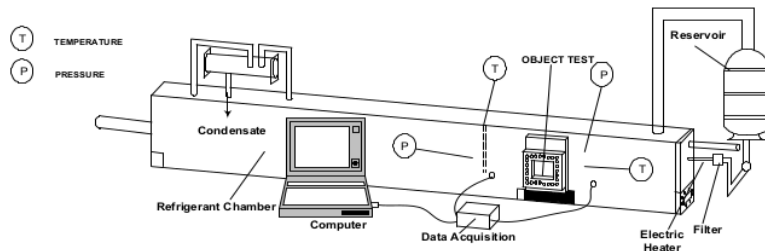


Figure 1. Testing Apparatus Scheme

MC 22 refrigerant with constant pressure and volume flowed on the surface of a copper rod with a diameter of 12 mm and a length of 70 cm. Various heat input is given from an electric heater. The temperature was measured using a thermometer data collection system using a K type thermocouple at 21 measurement points. The amount of heat flux from the heater is measured using a wattmeter. Temperature measurement configuration is shown in Figure 2.

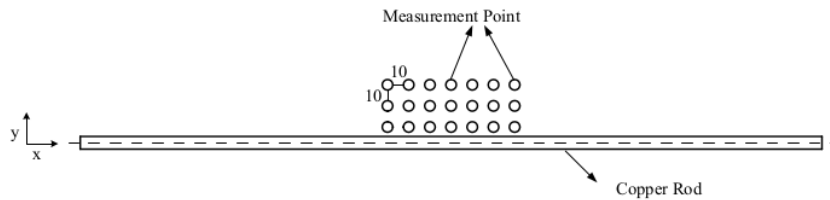


Figure 2. Configuring temperature measurement

The temperature of the copper rod surface and the average temperature of refrigerant vapor is measured in a varying heat flux which is $2 \text{ kW/m}^2 \leq \text{heat flux} \leq 10 \text{ kW/m}^2$ with a range of heat flux changes of 2 kW/m^2 .

Systematically the procedure for testing the heat transfer of hydrocarbon refrigerants carried out in this study is: (a) calibrating the temperature measuring device (thermocouple); (b) filling the container with 7 kg MC 22 refrigerant; (c) measuring the saturated pressure of refrigerants; (d) pressing the ON electric resistive heater button with a flux heat of 2 kW/m^2 ; (e) measuring the copper rod surface temperature and the average temperature of refrigerant vapor; (f) increasing heat flux by 2 kW/m^2 ; re-measuring the temperature as in point (d); and (g) repeating steps 5 and 6 until heat flux reaches 10 kW/m^2 .

4. Discussion

Figure 3 shows the tendency of MC 22 refrigerant temperature to change for 20 minutes with an interval of two minutes.

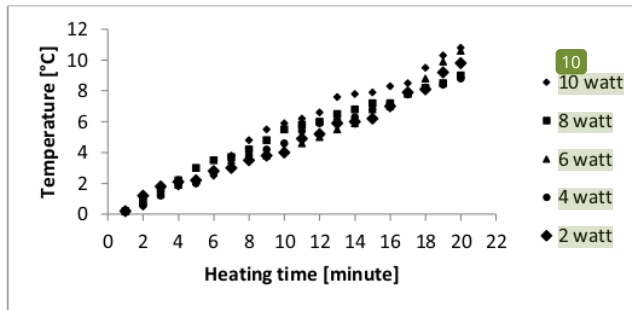


Figure3. Mean temperature changes vs Heating time

Figure 3 shows the temperature profile of the MC 22 refrigerant on the copper rod heating of 2 Watts of power at a time interval of 2 minutes, then increased continuously with the same time interval. The figure shows a significant changes in temperature profile when heating the copper rod with a power of 8 Watts and 10 Watts. The heating phenomenon of MC 22 refrigerant has a temperature profile that tends to change in different heat fluxes. This is in line with the results of the study [8, 9] that the characteristics of refrigerant temperature are affected by changes in heat flux.

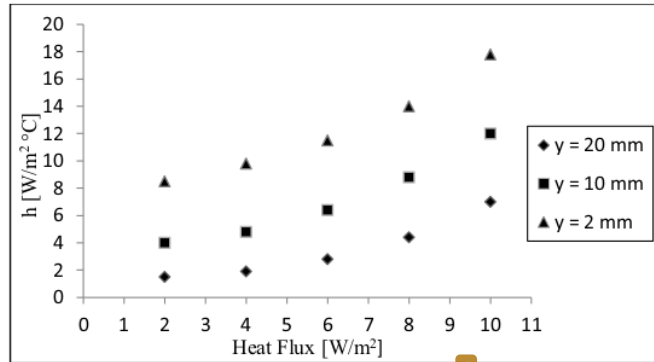


Figure 4. Heat transfer coefficient vs Heat flux

Figure 4 shows the effect of heat flux on the coefficient of heat transfer of MC 22 refrigerant. The greater the heat flux, the greater the heat transfer coefficient of refrigerant. This is consistent with the results of the study [10, 11] that the greater heat flux increases the heat transfer coefficient of refrigerant. From the description of Figures 3 and 4, it can be concluded that the boiling heat transfer coefficient is influenced by the refrigerant properties. This is supported by the assumption that refrigerant properties affect the heat transfer boiling coefficient [12]. Based on the that discussion, it is found that the greater the heat flux, the higher the boiling heat transfer coefficient of MC 22 refrigerant.

References

- [1] Johnson, C.E. and Derwent, R.G. 1996. *Relative Radiative Forcing Consequence of Global Emission of Hydrocarbon, Carbon Monoxide and NOx from Human Activities Estimated with a Zonally-Averaged Two-Dimensional Model*. Climatic Change, Vol.34, pp.439-462.
- [2] Kuntha, U. and T. Kiatsiriroat. 2002. Boiling Heat Transfer Coefficient of R22 refrigerant and its alternatives in horizontal tube: small refrigerator scale. Songklana Karis J. Scie.Technol. VOL. 24, No. 2 April-June 2002.
- [3] Zhou, Z., X. Fang, D. Li. 2013. Review Article: Evaluation of Correlation of Flow Boiling Heat Transfer of R22 in Horizontal Channels. Hindawi Publishing Corporation The Scientific World Journal, Volume: 2013.
- [4] Greco, A. and G.P. Vanoli. 2005. Flow Boiling Heat Transfer with HFC mixtures in smooth horizontal tube. Part I: Experimental investigations, Experimental Thermal and Fluid Science 29 (2005) 189-198.

- [5] Jiang, G.B., J.T. Tan, Q.X. Nian, S.C. Tang, W.Q. Tao. 2016. Experimental study of boiling heat transfer in smooth/micro-fin tubes of four refrigerant. *International Journal of Heat and Mass Transfer* 98 (2016) 631-642.
- [6] Smith, J.Q. and L. Cremaschi. 2014. Two Phase Flow Boiling Heat Transfer and Pressure Drop of Two New Low LGWP Developmental Refirhrants Alternatve to R410A. 15th Interntaional Refrigeration and Air Conditioning Conference at Purdue, July 14-17, 2014.
- [7] Zonouzi, S.A., H. Safarzadeh, H. Aminfar, M. Mohammadpourfard. 2018. Experimntal Study of Subcooled Boiling Heat Transfer of Axial and Swirling Flows inside Mini Annular Gaps. *Journal of Applied Fluid Mechanics*, Vol. 11, No. 1, pp. 225-232.
- [8] Bansal, P.K. and X. Zhao. 2006. Flow Boiling Heat Transfer of CO₂ at Low Temperature: A Critical Review. 7th IIR Gustav Lorentzen Conference on Natural Working Fluids, Trondheim, Norway, May 28-31, 2006.
- [9] Strak, K. and M. Piasecka. 2015. A Study of flow boiling heat transfer in a rectangular minichannel using liquid crystal and ifrared thermography. *Transactions IFFM* 128 (2015) 97-118 ISSN 0079-3205.
- [10] Mastrullo, L., A.W. Mauro, A. Rosato, G.P. Vanoli. 2009. Comparison of R744 and R134A heat transfer coefficients during flow boiling in a horizontal circular smooth tube. *International Conference on Renewable Energies and Power Quality (ICREPQ'09) Valencia (Spain), 15th to 17th April, 2009.*
- [11] Li, M., C. Dang, E. Hihara. 2012. Flow Boiling heat transfer of HFO1234yf and R32 refrigerant mixtures in a smooth horizontal tube: Part I. Experimental Investigation. *International Journal of Heat and Mass Transfer* 55 (2012) 3437-3446.
- [12] Byun, H.W., D.H., Kim, C. H., Song, S.H., Yoon, K.H., Lee, O.J., Kim. 2017 . Pool Boiling Heat Transfer Characteristics of Low GWP Refrigerants on Enhanced tube used in Flooded Evaporator for Turbo-Chiller. 12th IEA Heat Pump Conference.

Experimental Investigation of Boiling Heat Transfer Coefficient of MC22 on Horizontal Copper Rod

ORIGINALITY REPORT

11%

SIMILARITY INDEX

9%

INTERNET SOURCES

6%

PUBLICATIONS

4%

STUDENT PAPERS

PRIMARY SOURCES

1	ijeais.org Internet Source	2%
2	Subhanker Paul, Maria Fernandino, Carlos A. Dorao. "On the scaling of convective boiling heat transfer coefficient", International Journal of Heat and Mass Transfer, 2021 Publication	1%
3	e-jamet.org Internet Source	1%
4	eprints.usq.edu.au Internet Source	1%
5	sportdocbox.com Internet Source	1%
6	Submitted to Brunel University Student Paper	1%
7	Submitted to Cranfield University Student Paper	1%
8	www.hee.k.u-tokyo.ac.jp Internet Source	

1 %

9

Goldstein, R.J.. "Heat transfer-A review of 2005 literature", International Journal of Heat and Mass Transfer, 201010

Publication

1 %

10

goliat.eik.bme.hu

Internet Source

1 %

Exclude quotes On

Exclude matches < 10 words

Exclude bibliography On

Experimental Investigation of Boiling Heat Transfer Coefficient of MC22 on Horizontal Copper Rod

GRADEMARK REPORT

FINAL GRADE

/0

GENERAL COMMENTS

Instructor

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5

PAGE 6

PAGE 7
